

Protector™ Series

Diesel Generator Set

INCLUDES:

- Two Line LCD Multilingual Digital Evolution™ Controller (English/Spanish/French/Portuguese) with external viewing window for easy indication of generator status and breaker position.
- Isochronous Electronic Governor
- Sound Attenuated Aluminum Enclosure
- Smart Battery Charger
- UV / Ozone Resistant Hoses
- ±1% Voltage Regulation
- Integrated base tank options are available with run times over 90 hours without having to refuel*
- Five Year Limited Warranty
- UL 2200 / UL142 / ULC S601 Listed
- Meets code requirements for External Vent and Fill

Standby Power Rating

Model RD015 - 15 kW 60 Hz
Model RD020 - 20 kW 60 Hz
Model RD030 - 30 kW 60 Hz



QUIET-TEST



*Assembled in the USA using domestic and foreign parts

Meets EPA Emission Regulations
CA/MA Emissions Compliant

* Time calculated at one-half maximum kW output.

FEATURES

- **INNOVATIVE DESIGN & PROTOTYPE TESTING** are key components of GENERAC'S success in "IMPROVING POWER BY DESIGN." But it doesn't stop there. Total commitment to component testing, reliability testing, environmental testing, destruction and life testing, plus testing to applicable CSA, NEMA, EGSA, and other standards, allows you to choose GENERAC POWER SYSTEMS with the confidence that these systems will provide superior performance.
- **TEST CRITERIA:**
 - ✓ PROTOTYPE TESTED
 - ✓ SYSTEM TORSIONALTESTED
 - ✓ NEMA MG1-22 EVALUATION
 - ✓ MOTOR STARTING ABILITY
- **TRUE POWER™ ELECTRICAL TECHNOLOGY:** Superior harmonics and sine wave form produce less than 5% Total Harmonic Distortion for utility quality power. This allows confident operation of sensitive electronic equipment and micro-chip based appliances, such as variable speed HVAC systems.
- **SOLID-STATE, FREQUENCY COMPENSATED VOLTAGE REGULATION:** This state-of-the-art power maximizing regulation system is standard on all Generac models. It provides optimized FAST RESPONSE to changing load conditions and MAXIMUM MOTOR STARTING CAPABILITY by electronically torque-matching the surge loads to the engine. Digital voltage regulation at ±1%.
- **SINGLE SOURCE SERVICE RESPONSE** from Generac's extensive dealer network provides parts and service know-how for the entire unit, from the engine to the smallest electronic component.
- **GENERAC TRANSFER SWITCHES:** Long life and reliability are synonymous with GENERAC POWER SYSTEMS. One reason for this confidence is that the GENERAC product line includes its own transfer systems and controls for total system compatibility.

15 • 20 • 30 kW

GENERAC®

application and engineering data

GENERATOR SPECIFICATIONS

Type	Synchronous
Rotor Insulation Class	H (15 & 20 kW) or F (30 kW)
Stator Insulation Class	H
Telephone Interference Factor (TIF)	< 50
Alternator Output Leads 1-Phase	Three wire
Alternator Output Leads 3-Phase	Six wire
Bearings	Single Sealed Cartridge
Coupling	Direct, Flexible Disc
Excitation System	Direct
Total Harmonic Distortion	< 5%

VOLTAGE REGULATION

Type	Electronic
Sensing	Single Phase
Regulation	± 1%
Features	Adjustable Voltage & Gain

GOVERNOR SPECIFICATIONS

Type	Electronic Isochronous
Steady State Regulation	± 0.25%

ELECTRICAL SYSTEM

Battery Charge Alternator	50 Amp (15 & 20 kW), 65 Amp (30 kW)
Static Battery Charger	2 Amp
Recommended Battery (battery not included)	Group 27F, 700 CCA Group 31, 925 CCA batteries can also be used with 30kW units
System Voltage	12 Volts

ALTERNATOR SPECIFICATIONS

<p>Revolving field heavy duty generator Directly connected to the engine Operating temperature rise 120°C above a 40°C ambient Class H insulation is NEMA rated Class F insulation is NEMA rated All models fully prototype tested</p>

ENCLOSURE FEATURES

Aluminum weather protective enclosure	Ensures protection against mother nature. Electrostatically applied textured epoxy paint for added durability.
Enclosed critical grade muffler	Quiet, critical grade muffler is mounted inside the unit to prevent injuries and maximize sound dampening.
Small, compact, attractive	Makes for an easy, eye appealing installation.
SAE	Sound attenuated enclosure ensures quiet operation.

15 • 20 • 30 kW

ENGINE SPECIFICATIONS: 15 & 20 kW

Make	Mitsubishi
Model	In-line
Cylinders	4
Displacement (Liters)	2.505
Bore (in / mm)	3.46 / 88
Stroke (in / mm)	4.06 / 103
Compression Ratio	22:1
Intake Air System	Naturally Aspirated
Cylinder Head Type	Cast Iron OHV
Piston Type	Aluminum

ENGINE SPECIFICATIONS: 30 kW

Make	Perkins
Model	In-line
Cylinders	4
Displacement (Liters)	2.216
Bore (in / mm)	3.30 / 84
Stroke (in / mm)	3.94 / 100
Compression Ratio	23.3:1
Intake Air System	Turbocharged / Aftercooled
Cylinder Head Type	Cast Iron OHV
Piston Type	Aluminum

ENGINE LUBRICATION SYSTEM

Oil Pump Type	Gear
Oil Filter Type	Full flow spin-on canister
Crankcase Capacity (quarts / liters)	6.87 / 6.5 - 15 & 20 kW 11.2 / 10.6 - 30 kW

ENGINE COOLING SYSTEM

Water Pump	Pre-lubed, self-sealing
Fan Speed (rpm)	2376 - 15 & 20 kW 1980 - 30 kW
Fan Diameter (in / mm)	18.11/460 (15 & 20 kW) 18/457.2 (30kW)
Fan Mode	Pusher

FUEL SYSTEM—TANK SPECIFICATIONS

Fuel Type	Ultra Low Sulfur Diesel Fuel
Fuel Pump Type	Mechanical Engine Driven Gear
Injector Type	Mechanical
Fuel Supply Line (mm / in)	7.94 / 0.31 (ID)
Fuel Return Line (mm / in)	N/A - 15 & 20 kW 4.76/0.19 (ID) - 30 kW
Fuel Specification	ASTM
Fuel Filtering (microns)	6—15 & 20 kW 25—30 kW

WEIGHTS AND DIMENSIONS

kW size	Tank size	Weight (lb / kg)	Dimensions (L x W x H) (in / cm)
15 kW	Extended	1528 / 693	81 x 31 x 51 / 206 x 79 x 129
	95 Gal	1757 / 797	81 x 31 x 65 / 206 x 79 x 165
20 kW	Extended	1528 / 693	81 x 31 x 51 / 206 x 79 x 129
	95 Gal	1757 / 797	81 x 31 x 65 / 206 x 79 x 165
30 kW	Extended	1857 / 842	95 x 35 x 59 / 241 x 89 x 150
	132 Gal	2070 / 939	95 x 35 x 68 / 241 x 89 x 173

TANK SPECIFICATIONS

kW size	Tank	Capacity		Run Time at 1/2 Load (hrs)
		Total Capacity	Usable Capacity	
15 kW	Extended Tank (gal / L)	33.5 / 127	32 / 121	39
	95 Gal Tank (gal / L)	98.5 / 372.9	95 / 359.6	115.8
20 kW	Extended Tank (gal / L)	33.5 / 127	32 / 121	31
	95 Gal Tank (gal / L)	98.5 / 372.9	95 / 359.6	92.2
30 kW	Extended Tank (gal / L)	61 / 233	57 / 215	41.6
	132 Gal Tank (gal / L)	138.5 / 524	132 / 500	96.4

15 • 20 • 30 kW

application and engineering data

GENERATOR OUTPUT VOLTAGE / KW-60 HZ

		kW (standby)	Amp (standby)	kW (Prime)	Amp (Prime)	CB Size
RD015	120/240 V, 1Ø, 1.0 pf	15	62	12	50	70
	120/208 V, 3Ø, 0.8 pf	15	52	12	42	60
	120/240 V, 3Ø, 0.8 pf	15	45	12	36	50
RD020	120/240 V, 1Ø, 1.0 pf	20	83	16	67	100
	120/208 V, 3Ø, 0.8 pf	20	69	16	56	80
	120/240 V, 3Ø, 0.8 pf	20	60	16	48	70
RD030	120/240 V, 1Ø, 1.0 pf	30	125	24	100	150
	120/208 V, 3Ø, 0.8 pf	30	104	24	83	125
	120/240 V, 3Ø, 0.8 pf	30	90	24	72	100
	277/480 V, 3Ø, 0.8 pf	30	45	24	36	50

SURGE CAPACITY IN AMPS

		Voltage Dip @ < 0.4 pf	
		15%	30%
RD015	120/240 V, 1Ø	53	129
	120/208 V, 3Ø	37	90
	120/240 V, 3Ø	32	78
RD020	120/240 V, 1Ø	87	211
	120/208 V, 3Ø	59	143
	120/240 V, 3Ø	51	124
RD030	120/240 V, 1Ø	66	168
	120/208 V, 3Ø	59	144
	120/240 V, 3Ø	51	125
	277/480 V, 3Ø	26	64

ENGINE FUEL CONSUMPTION

		gal/hr	L/hr
RD015	25% of rated load	0.60	2.27
	50% of rated load	0.85	3.22
	75% of rated load	1.10	4.16
	100% of rated load	1.46	5.53
RD020	25% of rated load	0.77	2.9
	50% of rated load	1.03	3.90
	75% of rated load	1.46	5.53
	100% of rated load	1.97	7.46
RD030	25% of rated load	0.97	3.67
	50% of rated load	1.37	5.19
	75% of rated load	1.97	7.46
	100% of rated load	2.77	10.49

15 • 20 • 30 kW

ENGINE COOLING

	15 kW	20 kW	30 kW
Air flow (inlet air including alternator and combustion air in cfm/cmm)	2750 / 78	2750 / 78	2800 / 79
System coolant capacity (gal / liters)	3.0 / 11.4	3.0 / 11.4	2.5 / 9.5
Heat rejection to coolant (BTU per hr/MJ per hr)	95,220 / 100.5	95,220 / 100.5	128,638 / 135.7
Maximum operation air temperature on radiator (°C/°F)	50 / 122		
Maximum ambient temperature (°C/°F)	50 / 122		

COMBUSTION REQUIREMENTS

	15 kW	20 kW	30 kW
Flow at rated power (cfm / cmm)	86.3 / 2.4	86.3 / 2.4	88 / 2.5

SOUND EMISSIONS

Sound output in dB(A) at 23 ft (7 m) with generator in exercise mode*	65
Sound output in dB(A) at 23 ft (7 m) with generator operating at normal load*	70

EXHAUST

	15 kW	20 kW	30 kW
Exhaust flow at rated output (cfm/cmm)	98.88 / 2.8	98.88 / 2.8	296.6 / 8.4
Exhaust temperature at rated output (°C/°F)	482 / 900	482 / 900	499 / 930

ENGINE PARAMETERS


Rated Synchronous RPM	1800		
HP at rated kW	26.4	33.5	49

POWER ADJUSTMENT FOR AMBIENT CONDITIONS

Temperature Deration3% for every 5 °C above 25 °C or 1.7% for every 5 °F above 77 °F
 Altitude Deration (15 & 30 kW).....1% for every 100 m above 915 m or 3% for every 1000 ft above 3000 ft
 Altitude Deration (20 kW)1% for every 100 m above 305 m or 3% for every 1000 ft above 1000 ft

CONTROLLER FEATURES


2-Line Plain Text Multilingual LCD Display Simple user interface for ease of operation.
 Mode Buttons: Auto Automatic Start on Utility failure. Programmable 7 day exerciser.
 Manual Start with starter control, unit stays on. If utility fails, transfer to load takes place.
 Off Stops unit. Power is removed. Control and charger still operate.
 Ready to Run/Maintenance Message Standard
 Engine Run Hours Indication Standard
 Programmable start delay between 2-1500 seconds Standard (programmable by dealer only)
 Utility Voltage Loss/Return to Utility Adjustable From 140-171 V/190-216 V
 Future Set Capable Exerciser/Exercise Set Error Warning Standard
 Run/Alarm/Maintenance Logs 50 Events Each
 Engine Start Sequence Cyclic cranking: 16 sec on, 7 rest (90 sec maximum duration)
 Starter Lock-out Starter cannot re-engage until 5 seconds after engine has stopped.
 Smart Battery Charger Standard
 Charger Fault/Missing AC Warning Standard
 Low Battery/Battery Problem Protection and Battery Condition Indication Standard
 Automatic Voltage Regulation with Over and Under Voltage Protection Standard
 Under-Frequency/Overload/Stepper Overcurrent Protection Standard
 Safety Fused/Fuse Problem Protection Standard
 Automatic Low Oil Pressure Standard
 Overcrank/Overspeed (@ 72 Hz)/RPM Sense Loss Shutdown Standard
 High Engine Temperature Shutdown Standard
 Internal Fault/Incorrect Wiring Protection Standard
 Common External Fault Capability Standard
 Field Upgradeable Firmware Standard
 Low Coolant Level Shutdown Standard

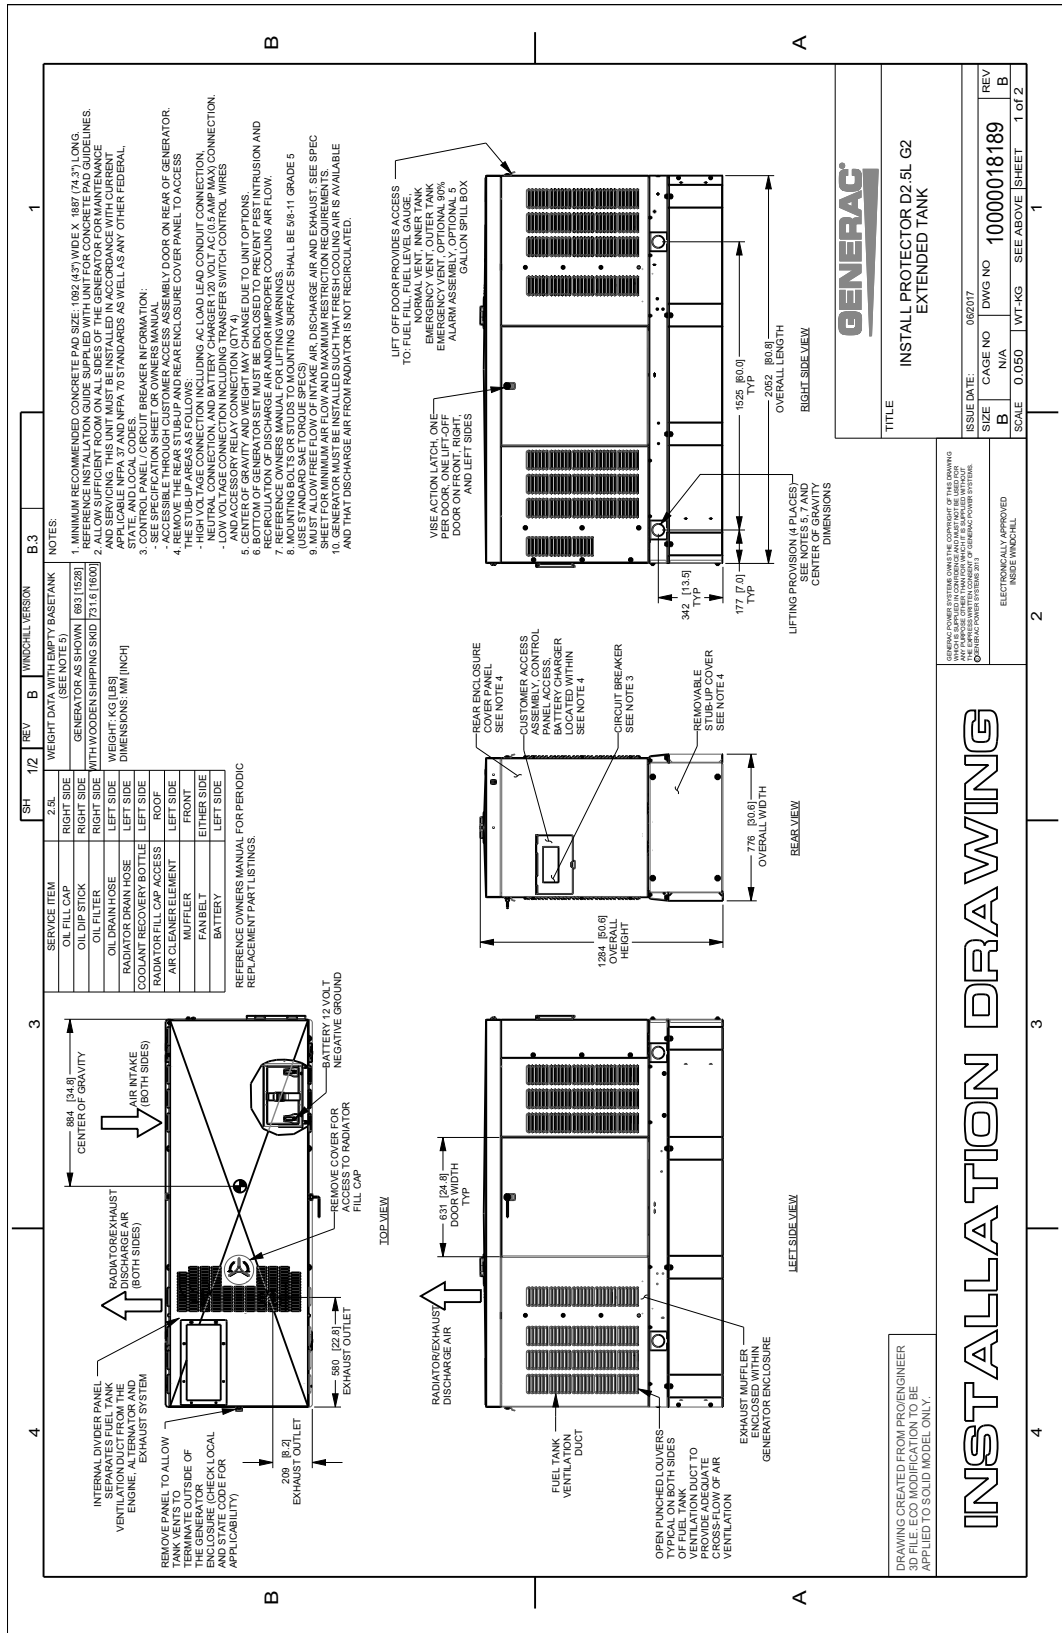

INSTALLATION DRAWING


DRAWING CREATED FROM PROENGINEER 3D FILE. ECO MODIFICATION TO BE APPLIED TO SOLID MODEL ONLY.

D2.5L G2 Extended Tank (2 of 2)

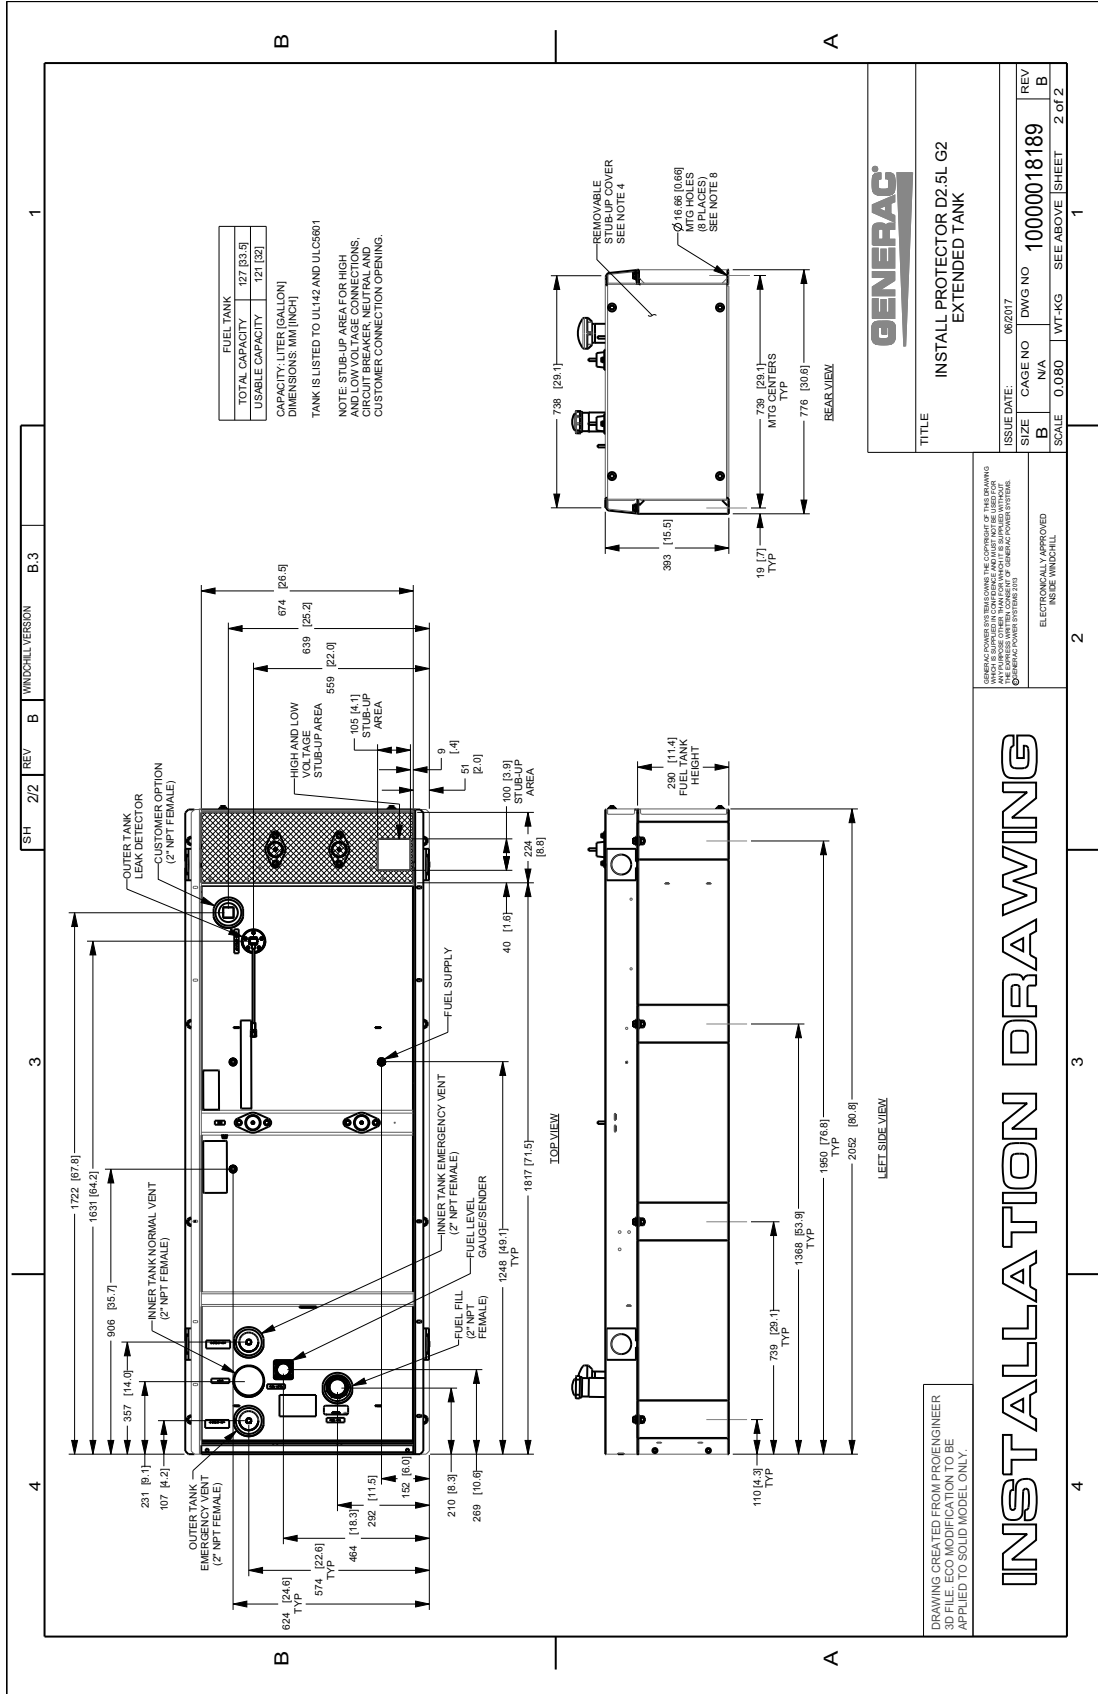


15 • 20 kW


D2.5L G2 95 Gal Tank (2 of 2)

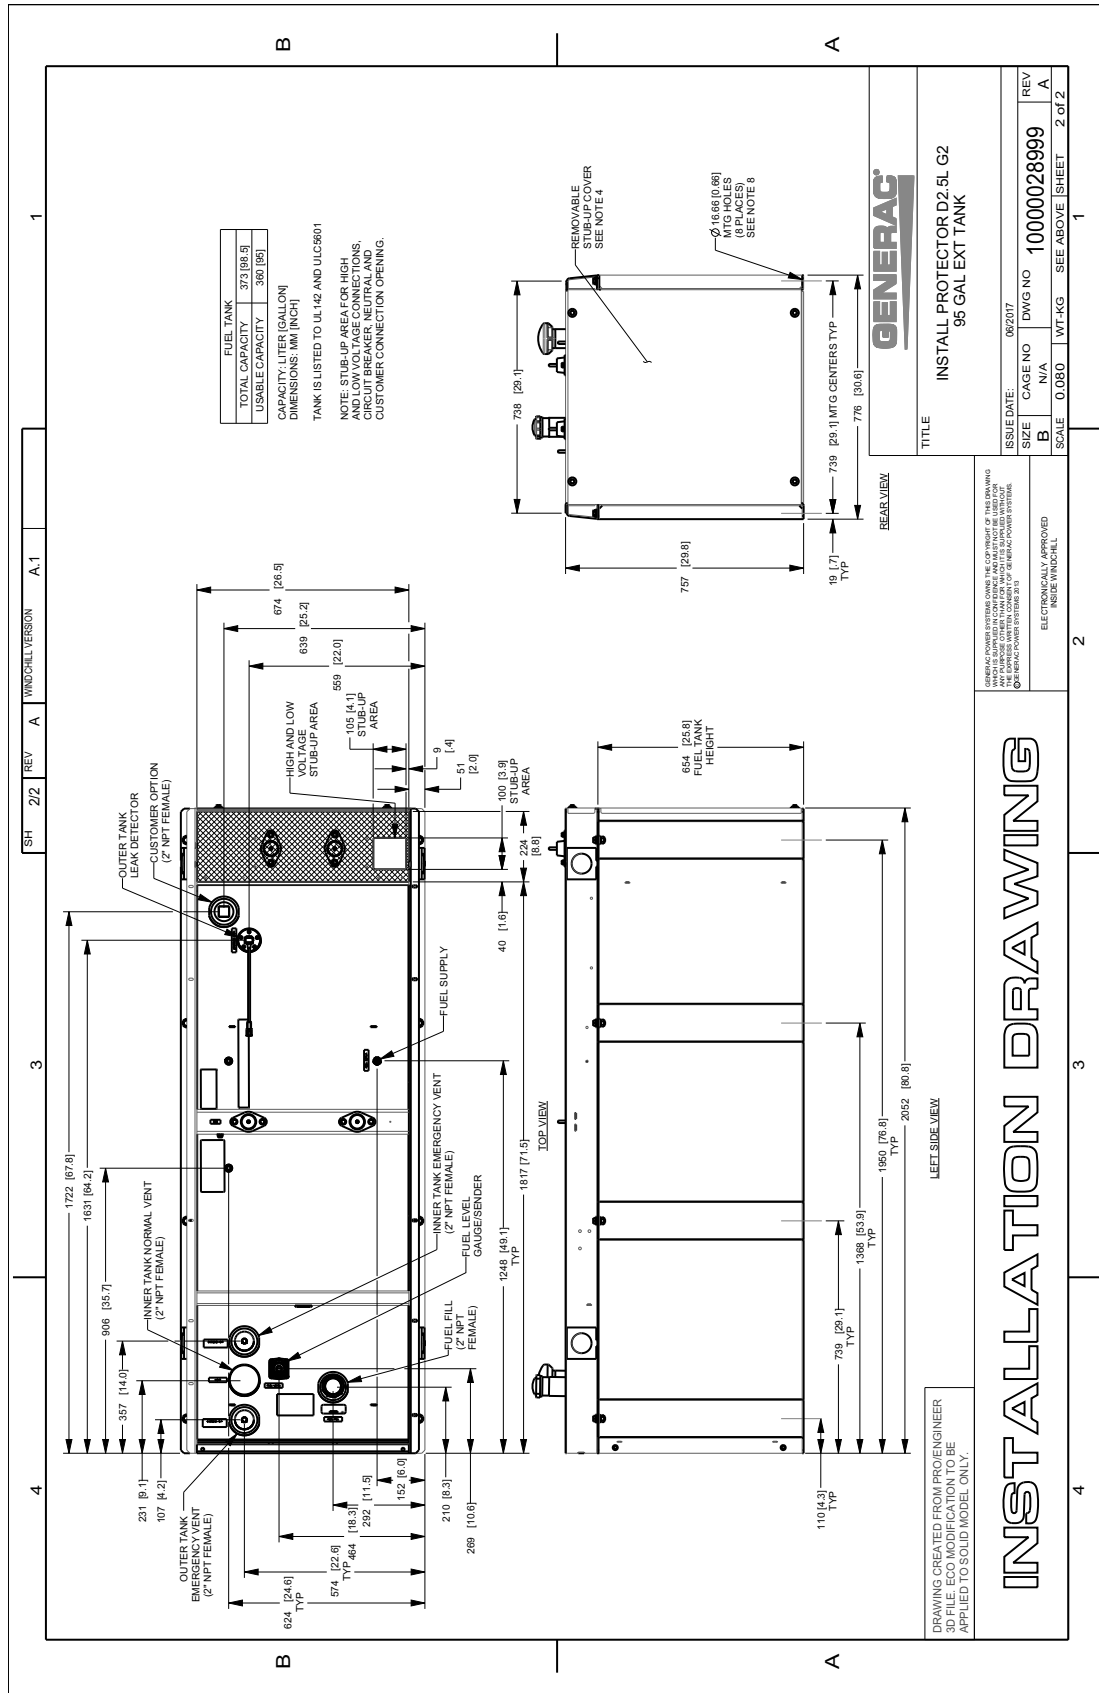

30 kW

D2.2L G22 Extended Tank (2 of 2)

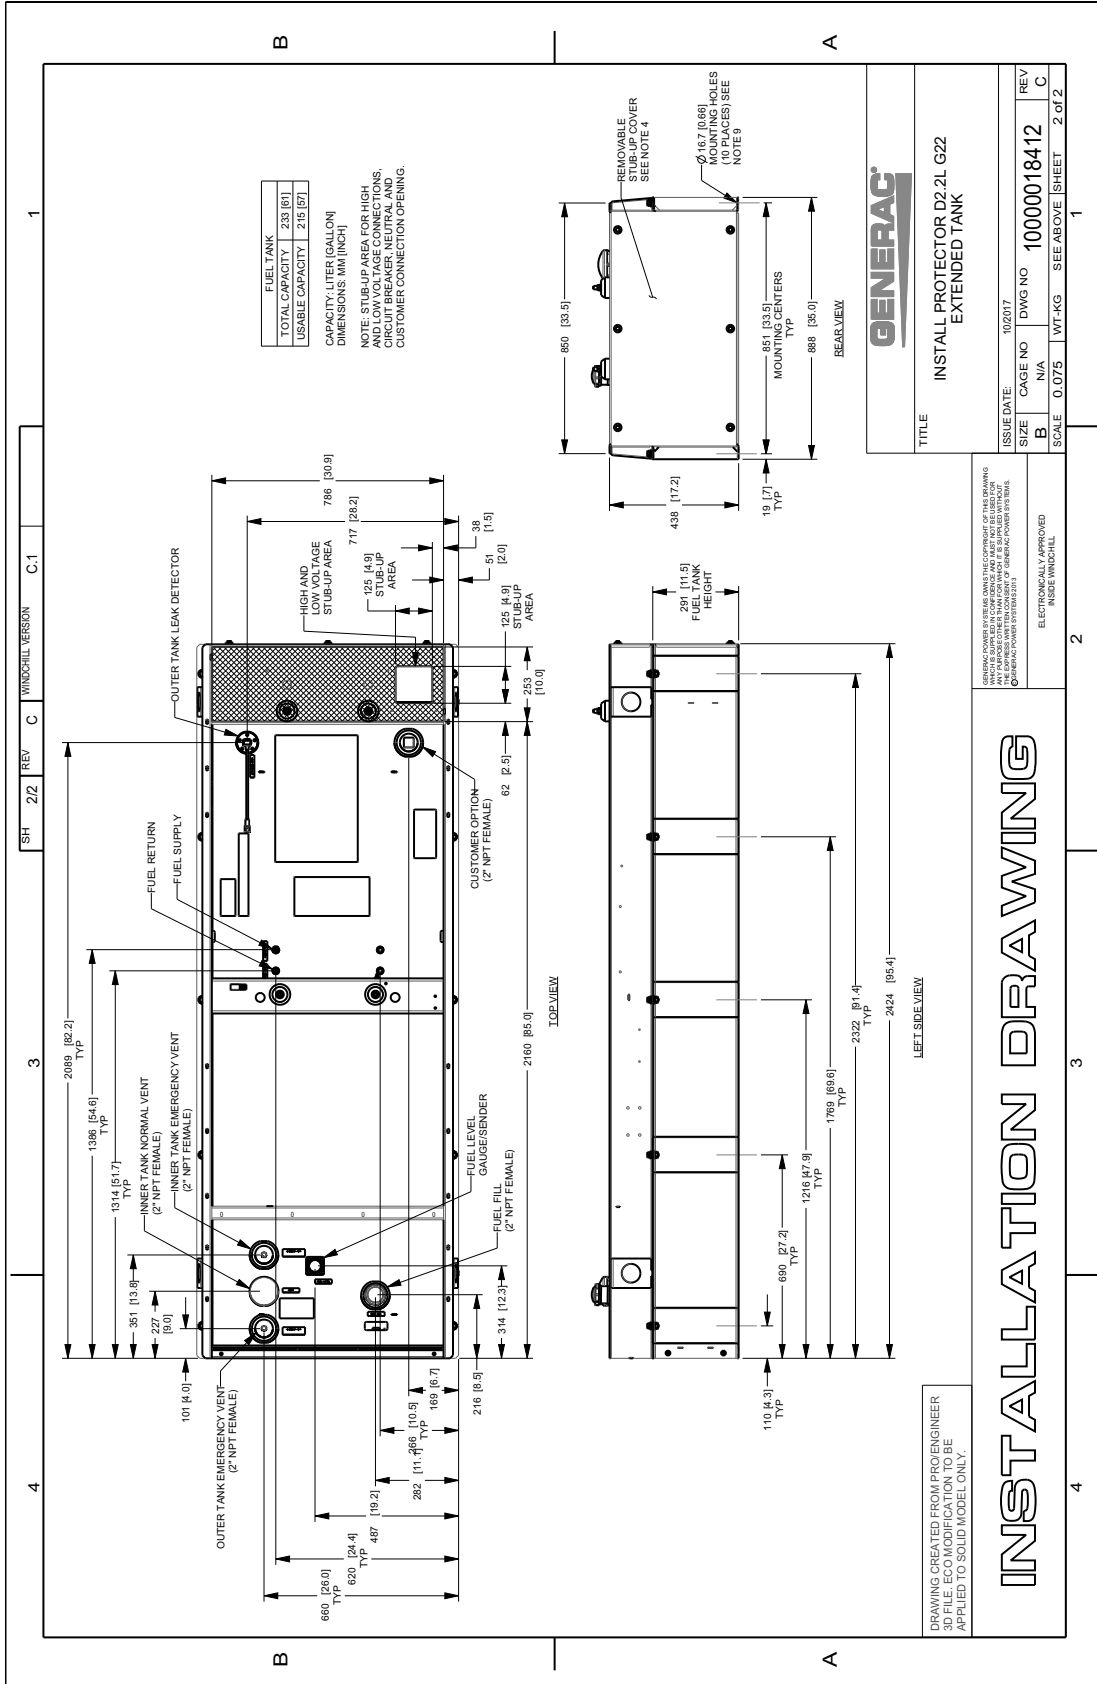

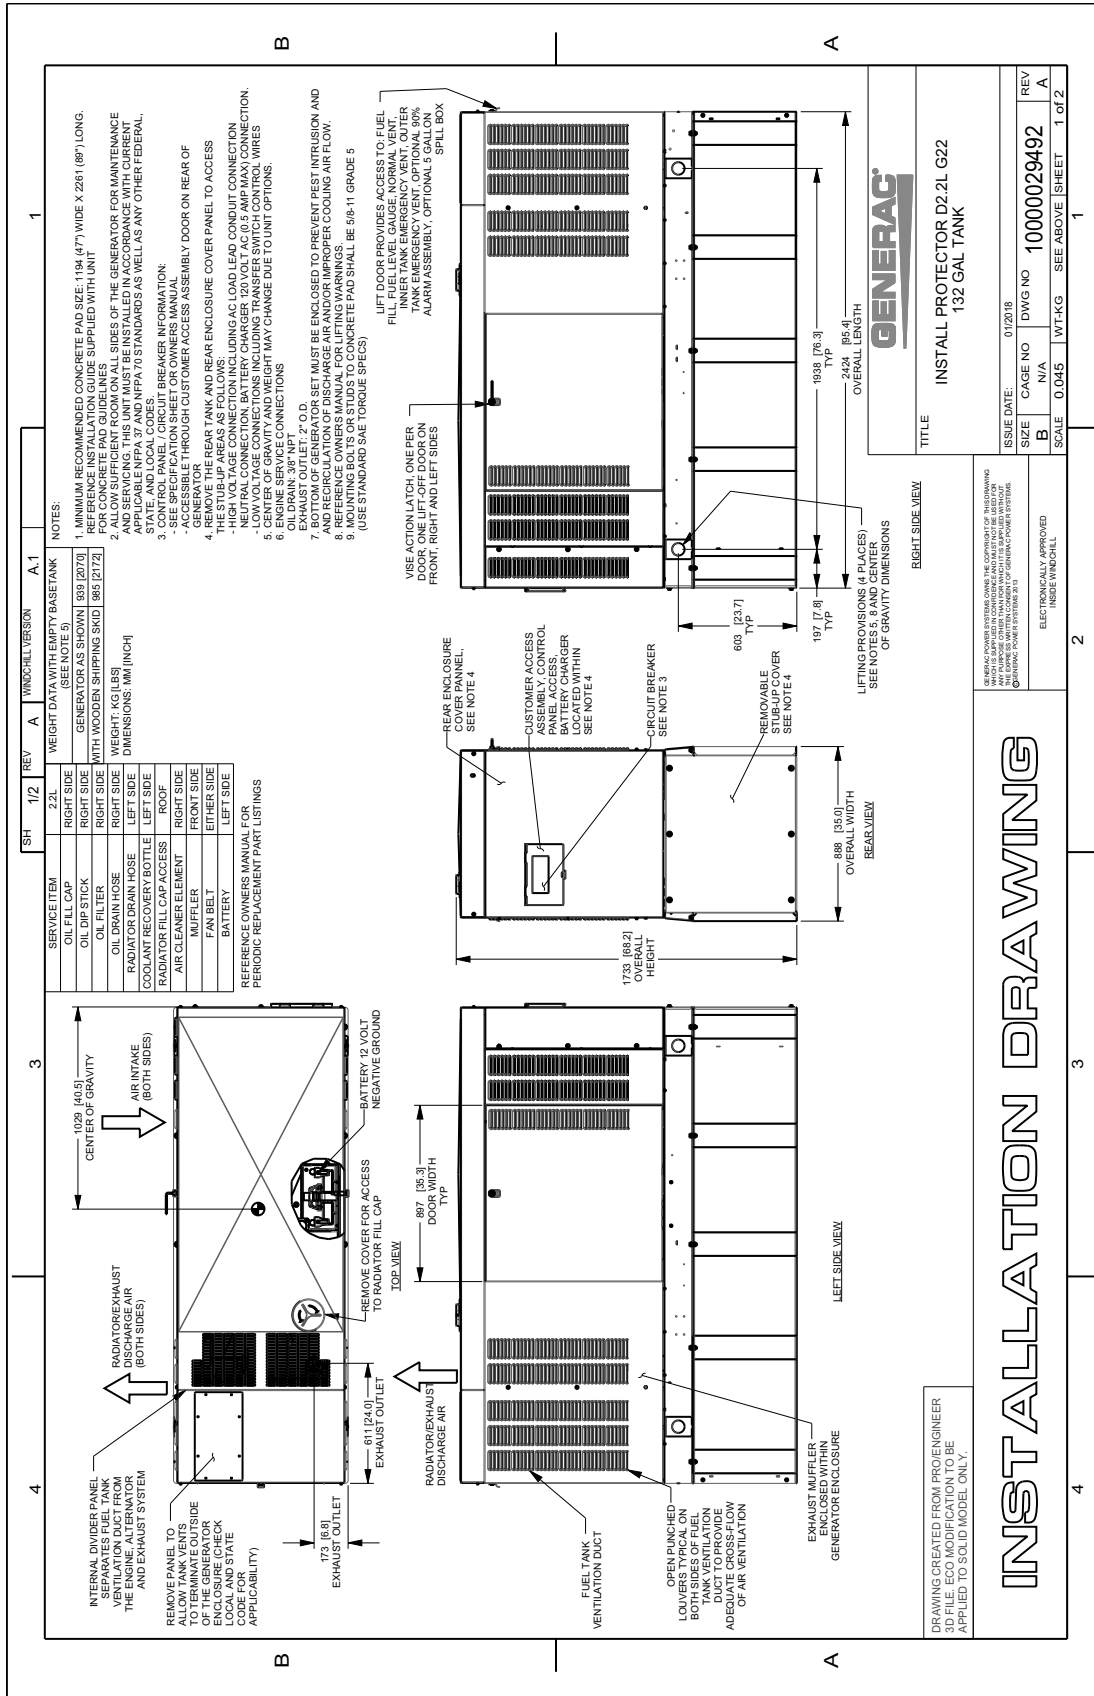

INSTALLATION DRAWING

DRAWING CREATED FROM PROENGINEER FILE. NO MODIFICATION TO BE APPLIED TO SOLID MODEL ONLY.

30 kW


D2.2L G22 132 Gal Tank (2 of 2)

GENERAC

installation drawings

Protector™

13 of 14

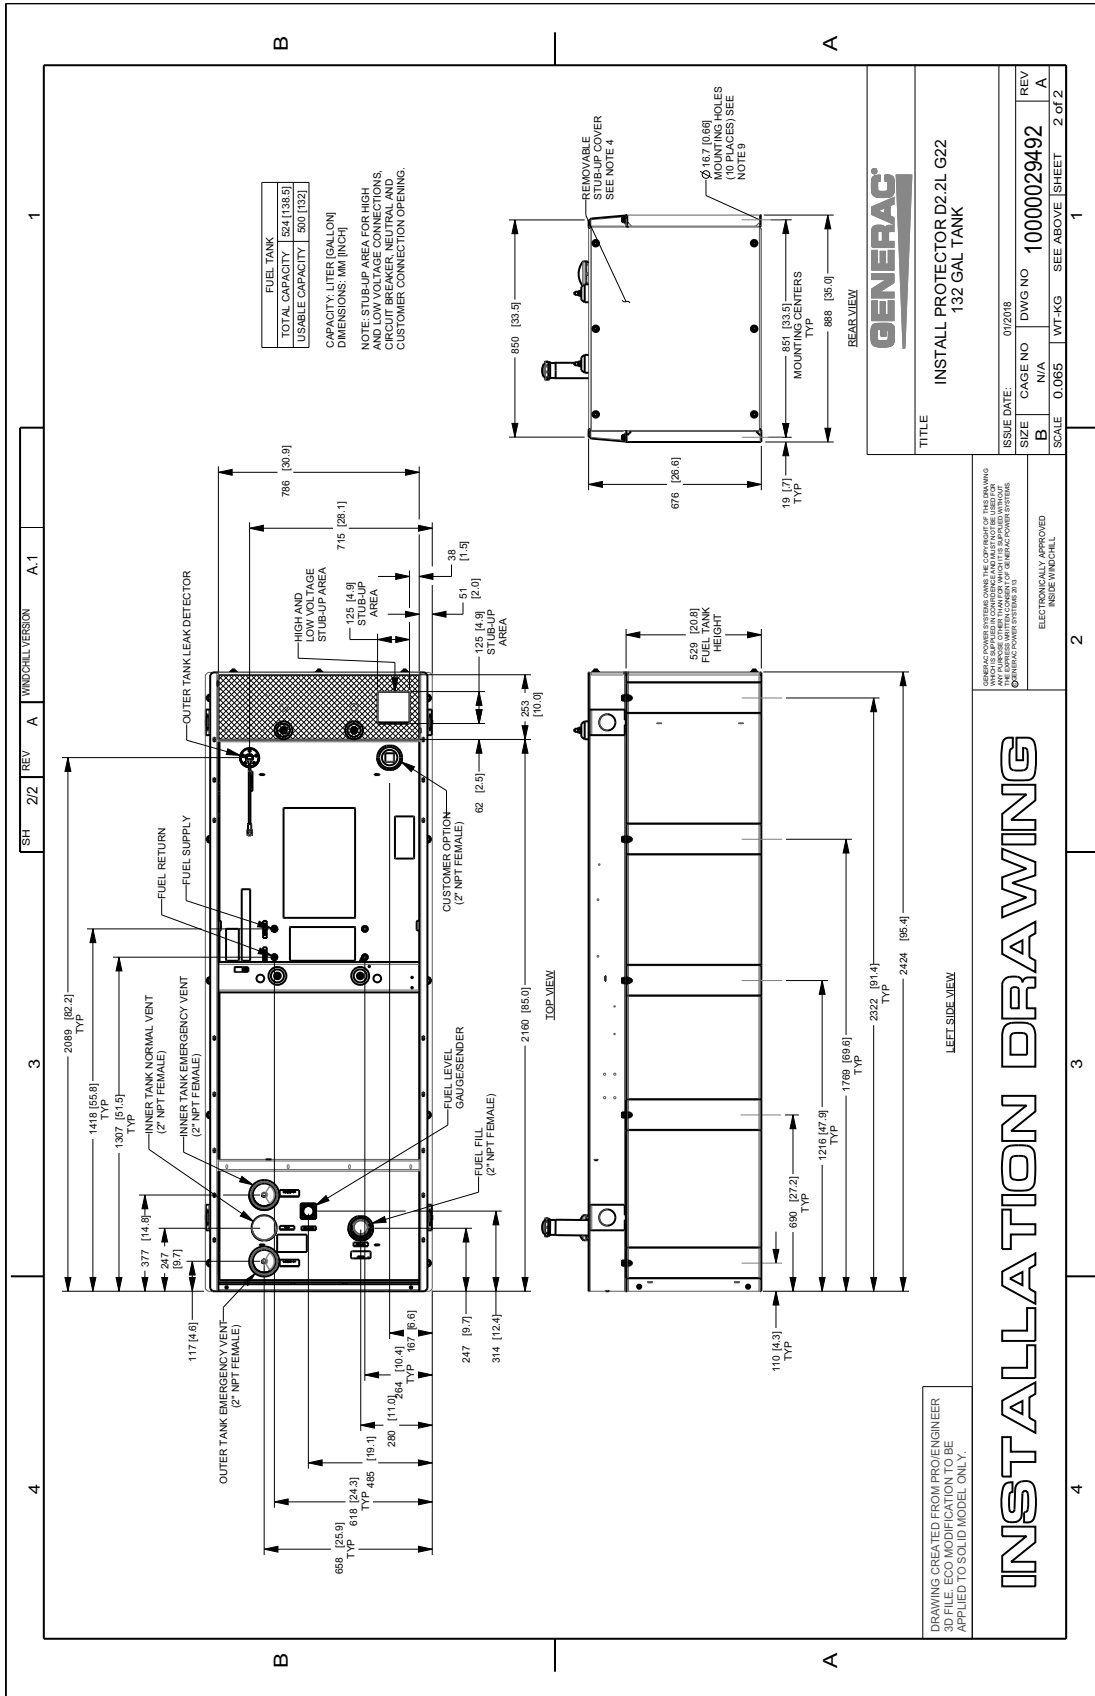

15 • 20 • 30 kW

GENERAC

available accessories

Model #	Product	Description
G006463-4	Mobile Link™	Generac's Mobile Link allows you to check the status of your generator from anywhere that you have access to an Internet connection from a PC or with any smart device. You will even be notified when a change in the generator's status occurs via e-mail or text message. Note: Harness Adapter Kit required. Available in the U.S. only.
G006478-0	Harness Adapter Kit	The Harness Adapter Kit is required to make liquid-cooled units compatible with Mobile Link™.
G006502-0	Spill Box	The 5-gallon spill box screws into the existing fuel fill port of the base tank. It captures and contains fuel if over fueling or spilling occurs during the fill process.
G006504-0	90% Fuel Level Alarm	The 90% fuel level alarm alerts the fuel fill operator when the tank reaches a 90% fill level by sounding an audible alarm and triggering an LED warning light.
G006505-0 - 15 & 20 kW G006506-0 - 30 kW	Tank Risers	Tank risers are required in some municipalities to help avoid potential base tank corrosion caused by mounting on rough surfaces.
G006507-0	Fuel Fill Drop Tube	A powder coat painted, steel fuel fill drop tube is required in some municipalities to prevent sparking due to static electricity buildup, which can be caused by the fuel dropping into the tank from the fill area. Using a drop tube also results in submerged filling, which increases the fuel delivery flow rate and reduces vapors, foam and potential tank evaporation.
G007660-0 - 15 & 20 kW G007661-0 - 30 kW	Stainless Steel Fuel Lines	Some municipalities require the use of stainless steel fuel lines instead of the standard hoses provided with the diesel generator products. These stainless steel lines are fire resistant for additional safety.
G006510-0	E-Stop	E-stop allows for immediate fuel shutoff and generator shutdown in the event of an emergency.
G006511-0	Spill Box Drainback Kit	The spill box drainback kit allows fuel that was captured in the 5-gallon spill box to be drained directly back into the fuel tank to avoid vapors.
G006588-1	Vent Extension Support Kit	The vent extension support kit consists of two aluminum plates with the appropriate pipe cutouts to secure the vent extension pipes coming through the top of the generator enclosure. It helps to minimize stress on the NPT fittings integrated on the tank and also helps protect against pests.
G006512-0	Lockable Fuel Cap	The cast iron, lockable fuel cap provides the ability to lock the fuel system to prevent unwanted fuel tampering or fuel siphoning.
G007640-0 - 15 & 20 kW G007641-0 - 30 kW	Maintenance Kits	The Protector Maintenance Kits offer all the hardware necessary to perform complete maintenance on Generac Protector generators.
G007650-0 - 15 & 20 kW G007651-0 30 kW	Cold Weather Kits	Recommended for generators installed in regions where the temperature regularly falls below 32 °F (0 °C). The Cold Weather Kits consist of a block heater with all necessary mounting hardware and a battery warmer with a thermostat built into the battery wrap.
G005703-0	Paint Kit	If the generator enclosure is scratched or damaged, it is important to touch up the paint to protect from future corrosion. The paint kit includes the necessary paint to properly maintain or touch up a generator enclosure.
G006664-0	Local Wireless Remote	Completely wireless and battery powered, Generac's wireless remote monitor provides you with instant status information without ever leaving the house.
G006665-0	Wireless Remote Extension Harness	Recommended for use with the Wireless Remote on units up to 60 kW, required for use on units 70 kW or greater.
G006873-0	Smart Management Module (50 Amps)	Manage large loads by utilizing up to 8 individual Smart Management modules. These devices are installed directly in line with existing appliance wiring for easy installation.

GENERAC

Generac Power Systems, Inc. • S45 W29290 HWY. 59, Waukesha, WI 53189 • generac.com

©2018 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice. Part No. 10000023912 rev B (02/21/18)